


TRINCO™ MASTER MODEL 48/450RC

With all standard features including 450 CFM Abrasive Separator

| | |
|-------------------------|---|
| Inside Depth: | 24" |
| Width: | 48" |
| Height: | 23" |
| Overall Depth: | 40" (includes separator mounted on rear outside wall) |
| Width: | 53" |
| Height: | 64" |
| Door Openings: | Three (3) |
| Front Opening Type Lid: | 48" x 13" High |
| Side Door: (2 ea.) | 17" x 16" High |
| Shipping Weight: | 610 Lbs. (incl. separator) |

- Ruggedly built of 14 Gauge welded steel
- Double floor - 1/8" Expandex steel plus Carbon screen
- Trinco™ Tungsten carbide nozzle
- Trinco™ safety enclosed floor valve blasting control
- Trinco™ fluorescent lighting to eliminate shadows and minimize energy usage.
- Trinco™ large 12"x24" safety glass window for excellent visibility and operator efficiency
- Air pressure regulator and gauge
- Trinco™ easy change window frames
- Heavyweight rubber gloves, neoprene gloves optional

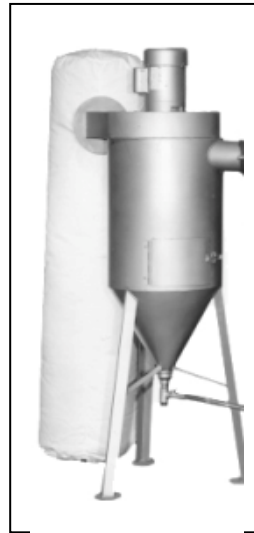

Abrasive Separator



Model 48

**NEVER USE SILICA-BASED PRODUCTS
IN TRINCO™ BLAST SYSTEMS
Ref. NIOSH Alert # 92-102**

TRINCO™ DRY BLAST APPLICATIONS

The applications of Trinco™ Cabinets are virtually limitless - cleaning, deburring, decorating, deflashing, etching, finishing, honing, peening, etc. All of these uses and more can be accomplished easily with quick sweeps of the gun nozzle. Scale, corrosion, old paint and other surface materials are removed in minutes leaving metal surfaces free of foreign matter and contamination. Even tough mill scale is quickly and efficiently removed.

The usual operating pressure for the Trinco™ Dry Blast Cabinets is 85 PSI. The equipment utilizes a variety of abrasives such as Trin Mixes™, glass beads, aluminum oxide, silicon carbide, nut shells, etc. A multitude of finishes are possible ranging from a micro-finish to a coarse-grade finish depending upon the specific media used. Trinco™ Cabinets can apply the proper abrasive to provide the desired finish for each specific application.